

**WO 2004/029941 A1**



## PCT

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(74) Agents:** BAHNG, Hae Cheol et al.; Kims International Patent & Law Office, 15th Floor, Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(72) **Inventors:** PARK, Yong Cheol; 215-204, Jugong APT., Wonmun-dong, Gwachon-si, Gyeonggi-do 427-030 (KR). KIM, Sung Dae; 1110-1406, Jugong APT., Sanbon 1(il)-dong, Gunpo-si, Gyeonggi-do 435-746 (KR).

The diagram illustrates the format of a track in a track cluster. It is divided into two main sections: a top-level track layout and a detailed track cluster structure.

**Top-Level Track Layout:**

- Lead-In Area:** Contains DMA (Defect Management Area) and TDMA (Temporary DMA).
- Data Area:** Contains ISA (Inner Spare Area) and OSAO (Outer Spare Area).
- Lead-Out Area:** Contains TDMA (Temporary DMA) and DMA (Defect Management Area).

**Track Cluster Structure:**

The track cluster is composed of  $N \times 256$  clusters. Each cluster contains the following information:

| Track Info or SBM | Track Info or SBM | Track Info or SBM | ... |
|-------------------|-------------------|-------------------|-----|
| TDFL              | TDFL              | TDFL              | ... |
| TDDS part         | TDDS part         | TDDS part         | ... |

**Legend:**

- DMA : Defect Management Area
- TDMA : Temporary DMA
- ISA : Inner Spare Area
- OSA : Outer Spare Area
- TDFL : Temporary Defect List
- TDDS : Temporary Disc Definition Structure

**(57) Abstract:** A write-once optical recording medium, and a method and apparatus for recording management information on the recording medium are provided. The method includes recording, in a temporary defect management area (TDMA), management information produced while the recording medium is in use, and transferring and recording the latest management information of the TDMA in a final defect management area (DMA) of the recording medium at a DMA fill-in stage of the recording medium.

**BEST AVAILABLE COPY**



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**WRITE-ONCE OPTICAL DISC, AND METHOD AND  
APPARATUS FOR RECORDING MANAGEMENT INFORMATION ON  
WRITE-ONCE OPTICAL DISC**

**5    Technical Field**

The present invention relates to a writable-once optical disc and a management information recording method and apparatus, and more particularly, to a method and apparatus for efficiently recording management information on a  
10    writable-once optical disc.

**Background Art**

Optical disc, which is a kind of optical recording media and can record a large  
15    amount of data, is widely being used. Today, a kind of innovative high-density digital versatile disc (HD-DVD) such as a blue ray disc (Blu-ray Disc), which can record and store video data of high quality and audio data of high fidelity for a long time, is under development.

The Blu-ray disc is a next generation optical recording solution that can store  
20    a larger amount of data than a conventional DVD. The Blu-ray disc employs a blue-violet laser with the wavelength of 405 nm which is shorter than the wavelength of 650 nm of a red laser used to access a conventional DVD. The Blu-ray disc has generally a thickness of 1.2 mm and a diameter of 12 cm. It includes a light transmission layer whose thickness is 0.1 mm so that the Blu-ray disc can store a  
25    larger amount of data than the current DVDs.

Various standards related to the Blu-ray discs are in development. Among the different types of Blu-ray discs, a Blu-ray Disc Rewritable (BD-RE) and a Blu-ray Disc Write-Once (BD-WO) are being developed.

FIG. 1 schematically illustrates a structure of a recording area of a general

BD-RE. Referring to FIG. 1, the BD-RE includes a recording layer divided into a lead-in area, a data area and a lead-out area. The data area includes a user data area for recording user data thereon, and an inner spare area ISA0 and an outer spare area OSA0 each allocated in the inner tracks and the outer tracks of the disc. These spare  
5 areas are used as replacement areas for replacing data in a defective area of the user data area according to linear replacement.

In the BD-RE, if a defective area is found in the user data area during recording, data in the defective area is transferred to and recorded on a spare area. Further, as defect management information for managing the defective area, position  
10 information and the like relating to the defective area and the corresponding spare area are recorded on defect management areas (DMA 1 ~ DMA 4) in the lead-in area and the lead-out area. Also, since data can be recorded on and erased from any area of the BD-RE repeatedly (since the BD-RE is rewritable), the entire BD-RE can be randomly used irrespective of a specific recording mode.

15 In contrast, in a writable-once Blu-ray disc (BD-WO), data can be recorded only one time on a specific area of the disc. As a result, the BD-WO has certain limitations pertaining to recording modes and in randomly using the entire area of the disc due to the defect management difficulty.

Further, in a BD-WO, management of the defective areas is one of the  
20 important matters that needs to be addressed, especially for data recording operations. But since the BD-WO is still in the early development stage, there are no schemes, no disc structures, no apparatuses, and no methods on how to manage the defective areas of the BD-WO and record management information on the BD-WO, which will be needed for the BD-WO to be commercially viable and operationally feasible.  
25 Accordingly, for the BD-WO, a unified specification is required that would satisfy the aforementioned advanced requirements. But any proposed specification relating to the current BD-RE cannot be used because it does not address the needs of the BD-WO.

**Disclosure of Invention**

Accordingly, the present invention is directed to a writable-once optical disc and a management information recording method and apparatus that substantially  
5 obviate one or more problems due to limitations and disadvantages of the background art.

An object of the present invention is to provide a method of recording disc management information such as timing, contents and location information in a plurality of management areas of a write-once optical disc.

10 Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written  
15 description and claims hereof as well as the appended drawings.

To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a method of recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a  
20 final defect management area (DMA), includes: recording, in the TDMA, management information produced while the recording medium is in use; and transferring and recording the latest management information of the TDMA in the DMA at a DMA fill-in stage of the recording medium.

In accordance with an aspect of the invention, a method of recording  
25 management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information, includes: if no defect management is to be performed on the recording medium, setting a predetermined value in the defect list area of the DMA;

recording, in the TDMA, management information produced while the recording medium is in use; and transferring and recording the latest management information of the TDMA in the DMA when the recording medium is to be finalized.

In accordance with another aspect of the invention, an apparatus for recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), includes a combination of elements configured for: recording, in the TDMA, management information produced while the recording medium is in use; and transferring and recording the latest management information of the TDMA in the DMA at a DMA fill-in stage of the recording medium.

In accordance with another aspect of the invention, an apparatus for recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information, includes a combination of elements configured for: setting a predetermined value in the defect list area of the DMA if no defect management is to be performed on the recording medium; recording, in the TDMA, management information produced while the recording medium is in use; and transferring and recording the latest management information of the TDMA in the DMA when the recording medium is to be finalized.

In accordance with another aspect of the invention, a write-once optical recording medium for recording management information thereon, includes: at least one recording layer including a temporary defect management area (TDMA) and a final defect management area (DMA), wherein management information produced while the recording medium is in use is recorded in the TDMA, and the latest management information of the TDMA is transferred and recorded in the DMA at a DMA fill-in stage of the recording medium.

In accordance with another aspect of the invention, a write-once optical recording medium for recording management information thereon, includes: at least

one recording layer including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information, wherein if no defect management is to be performed on the recoding medium, a predetermined value is set in the defect list area of the DMA; management information produced while the recording medium is in use is recorded in the TDMA; and the latest management information of the TDMA is transferred and recorded in the DMA when the recording medium is to be finalized.

It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### **Brief Description of the Drawings**

15

Further objects and advantages of the invention can be more fully understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 schematically illustrates a structure of a general single-layer BD-RE:

20

FIG. 2 is a block diagram of an optical recording/reproducing device according to the present invention;

FIG. 3 illustrates a structure of a writable-once optical disc such as a single layer BD-WO according to an embodiment of the present invention;

FIG. 4 illustrates an example of a DDS structure on a rewritable disc, a TDDS structure on a BD-WO and a disc management information recording method for the BD-WO according to an embodiment of the present invention;

25

FIG. 5 illustrates a structure of a writable-once optical disc such as a single layer BD-WO according to another embodiment of the present invention;

FIG. 6A shows an exemplary structure of a DMA of a single-layer BD-WO

according to an embodiment of the present invention;

FIG. 6B illustrates the structure of the DMA of FIG. 6A, a TDMA structure and a method of transferring data from the TDMA to the DMA according to an embodiment of the present invention;

5        FIG. 6C shows an exemplary structure of a DMA of a dual-layer BD-WO according to an embodiment of the present invention;

FIG. 7 shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a first embodiment of the present invention;

10       FIG. 8 shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a second embodiment of the present invention;

FIG. 9A shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a  
15       third embodiment of the present invention;

FIG. 9B shows an example of the DMA to which the DMA fill-in process of FIG. 9A is applied; and

FIG. 10 shows examples of values of a TDDS/DDS status flag recorded as part of the DDS information in the DDS section of the DMA according to the present  
20       invention.

### **Best mode for Carrying Out the Invention**

Reference will now be made in detail to the preferred embodiments of the  
25       present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numerals will be used throughout the drawings to refer to the same or like parts.

FIG. 2 is an example of a block diagram of an optical disc recording/reproducing device 20 according to an embodiment of the present



invention. The optical disc recording/reproducing device 20 includes an optical pickup 22 for writing/reading data to/from an optical recording medium 21, a servo unit 23 for controlling the pickup 22 to maintain a distance between an objective lens of the pickup 22 and the recording medium 21 and for tracking relevant tracks on the recording medium 21, a data processor 24 for processing and supplying input data to the pickup 22 for writing, and for processing data read from the recording medium 21, an interface 25 for exchanging data and/or commands with any external host 30, a memory or storage 27 for storing information and data therein including defect management data as needed (e.g., temporary defect management information, etc.) associated with the recording medium 21, and a microprocessor or controller 26 for controlling the operations and elements of the recording/reproducing device 20. Data to be written/read to/from the recording medium 21 may also be stored in the memory 27 if needed. All the components of the recording/reproducing device 20 are operatively coupled. The recording medium 21 is a recording medium of write-once type such as a BD-WO.

All the methods and disc structures discussed herein according to the present invention can be implemented using the recording/reproducing device 20 of FIG. 2 or any other suitable device/system. For example, the microcomputer 26 of the device 20 may be used to control allocation of the disc structure and to control the recording of management information on the recording medium and the transferring of the management information from a temporary area (e.g., TDMA) to a permanent or final area (e.g., DMA) on the recording medium 21. The TDMA and DMA will be discussed later in more detail.

A management information recording method for a writable-once optical disc such as a BD-WO according to the preferred embodiments of the present invention will be now described in detail with reference to the accompanying drawings. For a discussion convenience, a writable-once Blu-ray disc (BD-WO) will be exemplified. Herein, two types of a BD-WO - a single layer BD-WO and a dual layer BD-WO - are discussed. The single layer BD-WO has a single recording layer, whereas the

dual layer BD-WO has two recording layers.

FIG. 3 illustrates a structure of a writable-once optical recording medium such as a single-layer BD-WO according to an embodiment of the present invention. Referring to FIG. 3, the BD-WO includes a lead-in area, a data area, and a lead-out area allocated on the single recording layer. Each of the lead-in area and the lead-out area includes a plurality of defect management areas (DMA 1 and DMA 2; DMA 3 and DMA 4) for storing therein DMA information for defect management. Each of the DMAs 1-4 has a fixed size, e.g., 32 clusters. Generally, in view of the importance of defect management, the same information is written in each of the DMAs 1-4 so that if one of the DMAs is defective, then a different DMA can be accessed to obtain the defect management information.

It should be noted that in a general BD-RE, since data can be repeatedly recorded on and erased from a DMA (although the size of the DMA is limited), a DMA of large size is not required. However, in a BD-WO according to the present invention, since data cannot be repeatedly recorded on and erased from the DMA, a DMA of large size is required for defect management.

Still referring to FIG. 3, the lead-in area further includes a temporary defect management area (TDMA 1) for temporarily storing defect management information therein. The data area includes an inner spare area ISA0, a user data area, and an outer spare area OSA0. Parts of or the entire ISA0 and OSA0 are used as replacement areas for defective areas in the user data area according to linear replacement. For instance, during a recording of data into the user data area, if a defective area in the user data area is detected, then the data written or to be written to this defective area is transferred to a spare area (e.g., ISA0 or OSA0) according to a linear replacement scheme. The outer spare area OSA0 includes a temporary defect management area (TDMA 2). The defect management information temporarily stored in the TDMA 1 and/or TDMA 2 is also referred to herein as TDMA information.

In one embodiment, the TDMA 1 allocated to the lead-in area has a fixed size,

whereas the TDMA 2 allocated to the outer spare area OSA0 has a variable size depending upon the size of the spare area(s). For example, if the OSA0 has a size of  $N \times 256$  clusters where  $N > 0$  ( $N = \text{integer}$ ), then the TDMA 2 has a size of  $P$  clusters where  $P = (N \times 256)/4$ .

5 In one example, the same information may be written in each of the TDMA 1 and 2. In another example, the TDMA 1 and 2 may be sequentially used to sequentially record the TDMA information. Regardless, during replacement writing operations for writing data of a defective area onto a spare area, TDMA information is generated (e.g., under control of the microcomputer 26) and written onto the  
10 TDMA 1 and/or 2. The TDMA 1 and/or 2 are also updated periodically or as needed. When the BD-WO is ready to be finalized or the DMA is to be filled in for other reasons, then the TDMA information (latest version) temporarily written in the TDMA(s) is transferred and written onto one or each of the DMA 1-4. This transfer process will be discussed later in more detail.

15 The TDMA information written in each of the TDMA 1 and 2 includes temporary defect list (TDFL) information and temporary disc definition structure (TDDS) information. In one embodiment, the TDFL information includes one or a plurality of TDFLs (TDFL #1 ~ TDFL #n). Each TDFL includes one or a plurality of defect entries identifying defects and corresponding replacement areas on the disc.  
20 Each defect entry includes location information pertaining to a defective area of the user data area and the corresponding replacement area. For example, during a data recording operation on the BD-WO, if a defective area is found in the user data area, then data written or to be written in that defective area is written in a part (replacement area) of a spare area (e.g., ISA0 or OSA0) according to a linear  
25 replacement scheme. Then the information pertaining to the defective area and the replacement area and their relationship is entered as a defect entry in the TDFL. For instance, this information may include a first physical sector number of the defective area on the disc, a first physical sector number of the replacement area (spare area) corresponding to that defective area, and any other data pertaining to the defect for

defect management.

In one embodiment, the TDDS information written in each of the TDMA's 1 and 2 includes one or a plurality of TDDSs (TDDS #1 ~ TDDS #n). Each TDDS has a fixed size (e.g., one cluster) and includes location information pertaining to the TDFL(s) so that the location of any TDFL can be quickly identified by accessing the TDDS(s). This location information is also referred to herein as the TDDS part and can be written in a portion of Sector 0 of the one cluster. Here, a cluster has 32 sectors each sector having 2048 bytes. As an example only, the TDDS part may include one or more physical sector numbers each indicating a location of a TDFL written on the BD-WO, and any other information pertaining to the TDFL information.

Furthermore, each TDDS includes recording mode information (RM) and disc usage management information. The recording mode information identifies a recording mode of the BD-WO and can be written in a portion of Sector 0 of the one cluster. The disc usage management information identifies the status of a recording area of the BD-WO, and can be represented in one of the two forms: track information (Track-Info) and space bitmap information (SBM). This structure of the TDDS will be discussed in more detail later by referring to FIG. 4.

As the data recording operation for writing data into the data area progresses, the TDMA's may be updated periodically to reflect any recently discovered defective areas and corresponding replacement areas. After each updating of the TDMA, a TDFL and a corresponding TDDS, which may include all previous TDMA information and the recently generated TDMA information, may be written in the TDMA. In this aspect, the latest TDDS and TDFL written in the TDMA of the BD-WO would include the latest TDMA information. Then when the BD-WO is to be finalized or the DMA(s) is ready to be filled in, the latest TDDS and TDFL written on the BD-WO are transferred and written in one or each of the DMA's 1-4 as the final and most-updated defect management information.

FIG. 4 illustrates a DDS structure of a rewritable disc, an example of a TDDS

structure on a BD-WO and a disc management information recording method for the BD-WO according to an embodiment of the present invention. As shown in FIG. 4, in the DDS of a general rewritable optical disc, only 60 byte information corresponding to an extremely small portion of 1 cluster is used to store therein the DDS information. The entire remaining part of the DDS is all set to 'zero padding'.

In contrast, in the BD-WO, the entire TDDS area is used to store therein the TDDS information. As shown in FIGS. 3 and 4, the TDDS part and the recording mode information are written in Sector 0 of the cluster assigned as the TDDS, whereas Sectors 1-31 store therein the disc usage management information (Track-Info or SBM). In another example, the disc usage management information can be recorded on the first 31 sectors (Sectors 0 ~ 30) in the TDDS, and any remaining disc usage management information can be recorded on the last 32<sup>nd</sup> sector (Sector 31) in the TDDS along with the TDDS part and recording mode information.

The recording mode information identifies one of a plurality of recording modes employed in the BD-WO according to the present invention. In this example, a value of "0000 0000" may be used to indicate a sequential recoding mode, and a value of "0000 0001" may be used to indicate a random recording mode. Obviously, other examples are possible. Information about the BD-WO according to the present invention can be variously determined depending upon the needs through a process of specification regulation.

The disc usage management information is varied in dependence upon the disc usage. In the BD-WO, the disc usage management information is required for accurately searching and detecting the start point of an available recording area, and is used to distinguish a recording area from a non-recording area on the disc. In this aspect, the disc usage management information indicates where the available recording area and the recorded area are located within the data area (e.g., user data area).

As mentioned above, the disc usage management information can be represented as either the track information (Track-Info) or the space bitmap

information (SBM). The Track-Info is generally used when the BD-WO is recorded in a sequential recording mode. The SBM is generally used when the BD-WO is recorded in a random recording mode. These recording modes can be determined depending on the recording mode identified in the recording mode information stored in the TDDS.

In conventional writable-once optical discs, the recording status/mode information is expressed as 'track information' in case of compact disc series, and as 'Rzone', 'Fragment' or 'recording range' in case of DVD series. But in the present invention, the aforementioned various expressions relating to the recording status/mode information are commonly designated as 'Track-Info', and accordingly the Track-Info will be appreciated as having such meaning irrespective of expressions.

In one example, since the tracks on the BD-WO are sequentially used to record during the sequential recording mode, the Track-Info identifies the start point (location) of the recording area (e.g., user data area) of the BD-WO, and the end point (location) of the last recorded portion of the recording area. This information then indicates the start of the next available portion of the recording area on the BD-WO.

The bitmap information identifies a start point of an available recordable portion of the recording area on the BD-WO using bit values such as '0' and '1'. For instance, if a particular cluster area of the recording area on the BD-WO has been recorded, then it is indicated by allocating a value of '1' to every minimal recording unit (1 cluster). If a cluster area of the recording area has no recorded data thereon, then that cluster is assigned to a value of '0'. In this manner, if the SBM indicates that a particular cluster has a value of '1' assigned thereto, then it indicates that that cluster has been already used (i.e., it has recorded data thereon). If the SBM indicates that a particular cluster has a value of '0', then it indicates that that cluster has not been used yet (i.e., it has no recorded data thereon). Obviously, the reversal or some other values may be used to indicate the recording/non-recording state of

each area unit such as the clusters of the user data area. Thus, the SBM makes it possible to express a recording usage status of the disc even in the random recording mode.

FIG. 5 illustrates a structure of a writable-once optical disc such as a single layer BD-WO according to another embodiment of the present invention. The BD-WO structure of FIG. 5 is identical to the BD-WO structure of FIG. 3, except that the TDDS part and the recording mode information (RM) of TDDS information are updated and written after each update state as shown in FIG. 5. In this aspect, the disc usage management information (Track-Info or SBM) is stored in Sectors 0-30 of one cluster of the TDMA, and the TDDS part and RM are stored in Sector 31 of the one cluster. In another example, the TDDS part and RM may be stored in Sector 0 of one cluster of the TDMA, and the Track-Info or SBM may be stored in Sectors 1-31 of the one cluster.

Now, the method of transferring the TDMA information from the TDMA to the DMA according to the embodiments of the present invention will be explained by referring to FIGS. 6A-10. This transfer process is also called a DMA fill-in process.

FIG. 6A shows an exemplary structure of a DMA of a single-layer BD-WO, and FIG. 6B illustrates the structure of the DMA of FIG. 6A, a TDMA structure and a method of transferring data from the TDMA to the DMA according to an embodiment of the present invention. The DMA shown in FIGS. 6A and 6B equals one or each of the DMAs 1-4 shown in FIG. 3.

Referring to FIGS. 6A and 6B, the DMA is composed of 32 clusters. The Clusters 1-4 of the DMA are designated as a DDS section, whereas the Clusters 5-32 of the DMA are designated as a DFL section. All the clusters of the DMA in the BD-WO are designated for storing management data.

During the DMA fill-in process, the latest TDDS information from the TDMA is transferred to and recorded in each of Cluster 1 to Cluster 4 of the DMA as DDS information. In this example, the latest TDDS part (T0) and the latest disc

usage management information (Track-Info or SBM) (D0) of the TDDS information are transferred onto the DMA. As a result, the same DDS information is four times recorded in the DMA. The latest TDFL information from the TDMA is also transferred to and recorded in Clusters 5-32 of the DMA as DFL information. Here, the same DFL information can be recorded in the DMA up to seven times by designating four clusters of the DMA for recording the DFL information therein. In one example, the TDDS part written in the DDS section of the DMA may identify the location of the DFLs in the DMA on the BD-WO, and not necessarily the location of the TDFLs in the TDMA on the BD-WO. Storing the same information repeatedly in the DDS section or the DFL section ensures that the DMA information is not lost (e.g., due to a defect in a portion of the DMA) and is accurately and completely accessed each time it is needed.

FIG. 6C shows an exemplary structure of a DMA of a dual-layer BD-WO according to an embodiment of the present invention. Referring to FIG. 6C, one DMA of the dual-layer BD-WO is composed of a DMA part (Clusters 1-32) from a first recording layer L0 of the BD-WO, and a DMA part (Clusters 33-64) from a second recording layer (L1) of the BD-WO, which are accessed according to the tracking direction indicated with the arrow. The same DDS information (e.g., for both recording layers) is repeatedly recorded on the Clusters 1 ~ 8 of the DMA, and the same DFL information is repeatedly recorded on the Clusters 9 ~ 64 of the DMA, up to the maximum of, e.g., seven times. In addition, the BD-WO includes a lead-in area, a data area and an outer zone area on the first recording layer, and a lead-out area, a data area and an outer zone area on the second recording layer. Each of the data areas may include at least one spare area and a user data area. The lead-in area of the first recording layer may include a TDMA and first and second DMAs. The lead-out area of the second recording layer may include another TDMA and first and second DMAs. Here, as an example, one DMA shown in FIG. 6C may be composed of the first DMAs from the first and second recording layers, or of the second DMAs from the first and second recording layers. Additional DMAs may also be provided



in the outer zone areas. The spare area(s) may include additional TDMA(s).

Similar to the single layer BD-WO, the TDMA(s) in the lead-in/lead-out area of the dual layer BD-WO may have a fixed size, whereas the TDMA(s) in the spare areas may have a variable size depending upon the size of the spare area(s). The use and structure of the DMAs and TDMA(s) on the single layer BD-WO as discussed herein applies equally to the DMAs and TDMA(s) on the dual layer BD-WO.

In one embodiment, the latest disc usage management information is recorded each on the front part of a first DMA in the lead-in area and/or on the front/rear part of a DMA in the lead-out area (depending on whether the disc has a single or multiple recording layers). This allows the disc usage management information to be accessed quickly at the initial loading time of the disc. Further, the data reliability and data preservation can be assured by repetitive recording of same information in different parts of the disc.

FIG. 7 shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a first embodiment of the present invention. This DMA fill-in process is applicable to the BD-WO structures shown in FIGS. 3 and 5-6C, or other suitable BD-WO structures.

Referring to FIG. 7, the time for transferring the TDMA information into the DMA of the BD-WO is when the BD-WO is to be finalized. Defect management is performed on the BD-WO. As a result, the TDMA information produced while the BD-WO is in use is recorded in the TDMA, and when the BD-WO is to be finalized, the latest TDMA information from the TDMA is transferred to and recorded in the DMA.

The time for finalization is generally divided into three cases. The first case (50a) is when no more recording is performed on the BD-WO (e.g., data recording in the user data area is completed, or no user data area remains on the disc). The second case (50b) is when the TDMA is full of data and no further TDMA information can be recorded therein. As one example only, this case may occur if the entire TDMA(s) for recording the TDMA information have been used. The third case

(50c) is when the user requests a finalization of the BD-WO. As one example only, the user or host may request the finalization of the BD-WO even though some user data area or the TDMA is not full, or even though the user data recording in the user data area is not completed.

5 In all three cases of timing, the contents transferred from the TDMA to the DMA are the latest TDDS and TDFL information written in the TDMA of the BD-WO. The latest TDDS information and the latest TDFL information written in the TDMA are transferred to a DDS section and a DFL section of the DMA, respectively, during the DMA fill-in process.

10 FIG. 8 shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a second embodiment of the present invention. This DMA fill-in process is applicable to the BD-WO structures shown in FIGS. 3 and 5-6C or other suitable BD-WO structures.

15 The second embodiment addresses a scenario when the defect management (DM) on the BD-WO is not to be performed. Whether or not the DM is to be performed on the BD-WO can be determined during the initialization of the BD-WO or some other time based on known factors such as a user or host command not to perform defect management, etc. Referring to FIG. 8, if it is determined that the DM is not to be performed (50d) on the BD-WO (e.g., when the disc is initialized), then a  
20 specified value, sign or other indication is set in a DFL section of the DMA. This indication indicates that no DM is performed on the BD-WO (e.g., no defect lists are recorded on the BD-WO or no linear replacement schemes are performed to transfer the data of a defective user area to a replacement/spare area). When no DM is to be  
25 performed, A/V (audio/video) data can be recorded in real time. Here, since no DM is performed during the disc recording (e.g., into the user data area), no TDFLs are generated and the predetermined value or some other fixed indication can be set in the DFL section of the DMA. In one example, the predetermined value for indicating no DM is set in the DFL section of the DMA in advance before the

finalization of the BD-WO (e.g., at the disc initialization). At this time, the entire DFL section of the DMA may be padded with the zero value. In another variation, a predetermined value (e.g., zero) or some other indication may be set in the TDFL area of the TDMA, and then this value (TDFL information) may be transferred to the DFL section of the DMA while the TDDS information is transferred to the DDS section of the DMA during the DMA-fill in process (i.e., at the finalization of the BD-WO).

The process of transferring the TDDS information from the TDDS of the TDMA to the DDS section of the DMA in the second embodiment is identical to that of the first embodiment of FIG. 7. More specifically, after it is determined that no DM is to be performed on the BD-WO and then when the BD-WO is ready to be finalized, then the TDDS information is transferred to the DDS section of the DMA. As shown in FIG. 8, during the finalization of the BD-WO, in the first case (50a) when no more recording is performed on the BD-WO, in the second case (50b) when the TDMA is full, and in the third case when the user requests finalization of the BD-WO, the latest TDDS information from the TDMA is transferred and recorded in the DDS section of the DMA as part of DMA fill-in process.

For example, if the DMA fill-in process of FIG. 8 is applied to the DMA structure of FIG. 6A, the Clusters 1-4 of the DMA would store therein the predetermined value (e.g., zero), and the latest TDDS information from the TDMA is transferred and recorded in the DDS section of the DMA. As discussed above, the same latest TDDS information can be recorded up to seven times in the Cluster 5-32 of the DMA. That is, in the maximum 7 repetition recording, the same latest TDDS information is written in the Clusters 5-8, the Cluster 9-12, the Cluster 13-16, ... and the Clusters 29-32 of the DMA.

FIG. 9A shows a chart for explaining the timing, contents and location information associated with the DMA fill-in process of a BD-WO according to a third embodiment of the present invention. This DMA fill-in process is applicable to the BD-WO structures shown in FIGS. 3 and 5-6C or other suitable BD-WO

structures.

The third embodiment addresses a scenario when no more data can be recorded in the user data area of the BD-WO, but the spare area(s) and the TDMA(s) are not full and can still be used to perform defect management. If any recordable area remains in the spare area (e.g., ISA0 and OSA0) and the TDMA (e.g., TDMA 1 and 2) even though no more recordable area exists in the user data area of the BD-WO (e.g., because the user data area is full, etc.), then at that time, the latest TDDS and TDFL information from the TDMA is transferred and recorded into an area of the DMA. Subsequently, when the BD-WO is ready to be finalized, the latest TDDS and TDFL information at that time from the TDMA is transferred and recorded into another area of the DMA, such as the remaining area of the DMA.

Referring to FIG. 9A, in this embodiment, the DM is performed even during the reproduction of the BD-WO. Particularly, if the spare area and the TDMA are not full and are available for use in the DM even though the recordable user data area is not available (50e), the latest TDMA information of the TDMA at this time is transferred and recorded in only a partial area of the DMA before the finalization of the BD-WO. Subsequently, when the BD-WO is to be finalized (50b or 50c), the latest TDMA information of the TDMA at that time is then transferred and recorded in the remaining or another area designated of the DMA.

Here, the time for finalization is divided into two cases 50b and 50c, which are identical to the two cases 50b and 50c in FIG. 7. Briefly, the first case (50b) is when the TDMA is full of data and no further TDMA information can be recorded therein. The second case (50c) is when the user requests a finalization of the BD-WO.

FIG. 9B shows an example of the DMA to which the DMA fill-in process of FIG. 9A is applied. As shown in FIG. 9B, when the situation 50e occurs, the latest TDDS information is written as DDS information into two clusters (e.g., Clusters 1 and 2) of the DMA, and the latest TDFL information is written as DFL information into four clusters (e.g., Clusters 5-8) of the DMA. Here the latest TDFL information

is written once in Clusters 5-8 without any repetition. Then when the disc is to be finalized (50b or 50c), the latest TDDS information of that time is written as DDS information into two clusters (e.g., Clusters 3 and 4) of the DMA and the latest TDFL information of that time is written as DFL information into the remaining  
5 clusters of the DMA. For instance, the same TDFL information can be written up to six times in the Clusters 9-32 of the DMA. Other variations are possible.

FIG. 10 shows examples of values of a TDDS/DDS status flag recorded as part of the DDS information in the DDS section of the DMA according to the present invention. Such status flag can be used in all the disc structures and methods  
10 discussed herein according to the different embodiments of the present invention. This status flag informs the user, host or other entity under which status/case the TDDS or DDS information has been recorded on the BD-WO. The TDDS or DDS status flag may be of one-byte size or some other size.

For instance, in each of the above-discussed first to third embodiments of the  
15 present invention, the DDS information written in the DDS section of the DMA may include a DDS status flag. Similarly, the TDDS information written in the TDMA may include a TDDS status flag. One status flag having different values may be used to indicate different recording statuses of the TDDS and DDS information. In the alternative, separate TDDS status flag and DDS status flag can be used.

20 Referring to FIG. 10, if the same status flag is used for both the TDDS and DDS information, then the status flag of '0000 0000' may mean that the BD-WO is finalized in response to the user's request (50c) and that the management information (e.g., DDS information) is recorded in the DMA. The status flag of '0000 1111' may mean that the BD-WO is finalized because no more recording is  
25 allowed in the user data area (50a) and that the management information (e.g., DDS information) is recorded in the DMA. The status flag of '1111 0000' may mean that the BD-WO is finalized because the TDMA is full (50b) and that the management information (e.g., DDS information) is recorded in the DMA. The status flag of '1111 1111' may mean that the management information (e.g., TDDS information)

is recorded in the TDMA while the disc is in use. Obviously other variations or status flag values are possible.

#### **Industrial applicability**

5

Using the status flag discussed above, the status of the BD-WO can be determined or confirmed. For instance, when the disc is loaded for reproduction, the TDDS/DDS status flag value can be examined to determine under what circumstances and in what manner the DMA fill-in process occurred on the disc.

10 Thus, the efficient use of the disc can be assured.

It will be apparent to those skilled in the art than various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

**What is claimed is:**

1. A method of recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the method comprising:
  - recording, in the TDMA, management information produced while the recording medium is in use; and
  - transferring and recording the latest management information of the TDMA in the DMA at a DMA fill-in stage of the recording medium.
2. The method of claim 1, wherein the DMA fill-in stage of the recording medium is when the recording medium is to be finalized.
3. The method of claim 2, wherein the recording medium is to be finalized when no more recording in a user data area of the recording medium is allowed.
4. The method of claim 3, wherein in the transferring step, the latest management information includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.
5. The method of claim 2, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.
6. The method of claim 5, wherein in the transferring step, the latest management information includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording

medium.

7. The method of claim 2, wherein the recording medium is to be finalized in response to a user's request.

5

8. The method of claim 7, wherein in the transferring step, the latest management information includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

10

9. The method of claim 1, wherein the recording medium further includes a spare area and a user data area, and

wherein in the transferring step, the DMA fill-in stage is when a recordable area remains in the spare area and the TDMA even though no recordable area remains in the user data area of the recording medium, and latest management information of the TDMA at that time is transferred into a first area of the DMA.

15

10. The method of claim 9, further comprising:

transferring and recording latest management information of the TDMA into a second area of the DMA at a second DMA fill-in stage of the recording medium.

20

11. The method of claim 10, wherein the second DMA fill-in stage of the recording medium is when the recording medium is to be finalized.

25

12. The method of claim 11, wherein if the management information is recorded in the first area of the DMA, then a defect management is performed during reproduction of the recording medium; and if the management information is recorded in the second area of the DMA, then a defect management is not performed during reproduction of the recording medium.



13. The method of claim 11, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.

5

14. The method of claim 13, wherein in at least one of the transferring steps, the latest management information includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

10

15. The method of claim 11, wherein the recording medium is to be finalized in response to a user's request.

15

16. The method of claim 15, wherein in at least one of the transferring steps, the latest management information includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

20

17. The method of claim 1, wherein the recording medium is a writable-once Blu-ray disc (BD-WO).

25

18. The method of claim 1, wherein in the transferring step, the latest management information includes a status flag indicating a type of the DMA fill-in stage.

19. A method of recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information, the method comprising:

if no defect management is to be performed on the recoding medium, setting a predetermined value in the defect list area of the DMA;

recording, in the TDMA, management information produced while the recording medium is in use; and

5       transferring and recording the latest management information of the TDMA in the DMA when the recording medium is to be finalized.

20. The method of claim 19, wherein the DMA further includes a disc definition structure area for storing therein disc definition structure information, and  
10       wherein in the transferring step, the latest management information of the TDMA is transferred to the disc definition structure area of the DMA and is latest disc definition structure information associated with the recording medium.

21. The method of claim 19, wherein the recording medium is to be finalized  
15       when no more recording in a user data area of the recording medium is allowed.

22. The method of claim 19, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.

20       23. The method of claim 19, wherein the recording medium is to be finalized in response to a user's request.

24. The method of claim 19, wherein the recording medium is a writable-once  
25       Blu-ray disc (BD-WO).

25. The method of claim 19, wherein in the transferring step, the latest management information includes a status flag indicating a type of the finalization of the recording medium.

26. An apparatus for recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the apparatus comprising:

5 means for recording, in the TDMA, management information produced while the recording medium is in use; and

means for transferring and recording the latest management information of the TDMA in the DMA at a DMA fill-in stage of the recording medium.

10 27. An apparatus for recording management information on a write-once optical recording medium, the recording medium including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information, the apparatus comprising:

15 means for setting a predetermined value in the defect list area of the DMA if no defect management is to be performed on the recording medium;

means for recording, in the TDMA, management information produced while the recording medium is in use; and

20 means for transferring and recording the latest management information of the TDMA in the DMA when the recording medium is to be finalized.

28. A write-once optical recording medium for recording management information thereon, the recording medium comprising:

25 at least one recording layer including a temporary defect management area (TDMA) and a final defect management area (DMA),

wherein management information produced while the recording medium is in use is recorded in the TDMA, and

the latest management information of the TDMA is transferred and recorded in the DMA at a DMA fill-in stage of the recording medium.

29. The recording medium of claim 28, wherein the DMA fill-in stage of the recording medium is when the recording medium is to be finalized.

5        30. The recording medium of claim 29, wherein the recording medium is to be finalized when no more recording in a user data area of the recording medium is allowed.

10       31. The recording medium of claim 30, wherein the latest management information transferred and recorded in the DMA includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

15       32. The recording medium of claim 29, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.

20       33. The recording medium of claim 32, wherein the latest management information transferred and recorded in the DMA includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

25       34. The recording medium of claim 29, wherein the recording medium is to be finalized in response to a user's request.

35. The recording medium of claim 34, wherein the latest management information transferred and recorded in the DMA includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

36. The recording medium of claim 28, wherein the at least one recoding layer further includes a spare area and a user data area, and

5 wherein the DMA fill-in stage is when a recordable area remains in the spare area and the TDMA even though no recordable area remains in the user data area of the recording medium, and latest management information of the TDMA at that time is transferred into a first area of the DMA.

37. The recording medium of claim 36, wherein latest management  
10 information of the TDMA is transferred and recorded into a second area of the DMA at a second DMA fill-in stage of the recording medium.

38. The recording medium of claim 37, wherein the second DMA fill-in stage of the recording medium is when the recording medium is to be finalized.

15

39. The recording medium of claim 38, wherein if the management information is recorded in the first area of the DMA, then a defect management is performed during reproduction of the recording medium; and if the management information is recorded in the second area of the DMA, then a defect management is  
20 not performed during reproduction of the recording medium.

40. The recording medium of claim 38, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.

25

41. The recording medium of claim 40, wherein the latest management information recorded in at least one of the first and second areas of the DMA includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

42. The recording medium of claim 38, wherein the recording medium is to be finalized in response to a user's request.

5        43. The recording medium of claim 42, wherein the latest management information recorded in at least one of the first and second areas of the DMA includes latest temporary defect list information and latest temporary disc definition structure information associated with the recording medium.

10       44. The recording medium of claim 28, wherein the recording medium is a writable-once Blu-ray disc (BD-WO).

45. The recording medium of claim 28, wherein the latest management information includes a status flag indicating a type of the DMA fill-in stage.

15

46. A write-once optical recording medium for recording management information thereon, the recording medium comprising:

20       at least one recording layer including a temporary defect management area (TDMA) and a final defect management area (DMA), the DMA including a defect list area for storing therein defect list information,

      wherein if no defect management is to be performed on the recording medium, a predetermined value is set in the defect list area of the DMA,

      management information produced while the recording medium is in use is recorded in the TDMA, and

25       the latest management information of the TDMA is transferred and recorded in the DMA when the recording medium is to be finalized.

47. The recording medium of claim 46, wherein the DMA further includes a disc definition structure area for storing therein disc definition structure information,

and

wherein when the recoding medium is to be finalized, the latest management information of the TDMA is transferred to the disc definition structure area of the DMA and is latest disc definition structure information associated with the recording medium.

5

48. The recording medium of claim 46, wherein the recording medium is to be finalized when no more recording in a user data area of the recording medium is allowed.

10

49. The recording medium of claim 46, wherein the recording medium is to be finalized when the TDMA is full and no more management information can be recorded in the TDMA.

15


50. The recording medium of claim 46, wherein the recording medium is to be finalized in response to a user's request.

51. The recording medium of claim 46, wherein the recording medium is a writable-once Blu-ray disc (BD-WO).

20

52. The recording medium of claim 46, wherein the latest management information includes a status flag indicating a type of the finalization of the recording medium.


FIG. 1  
Background Art

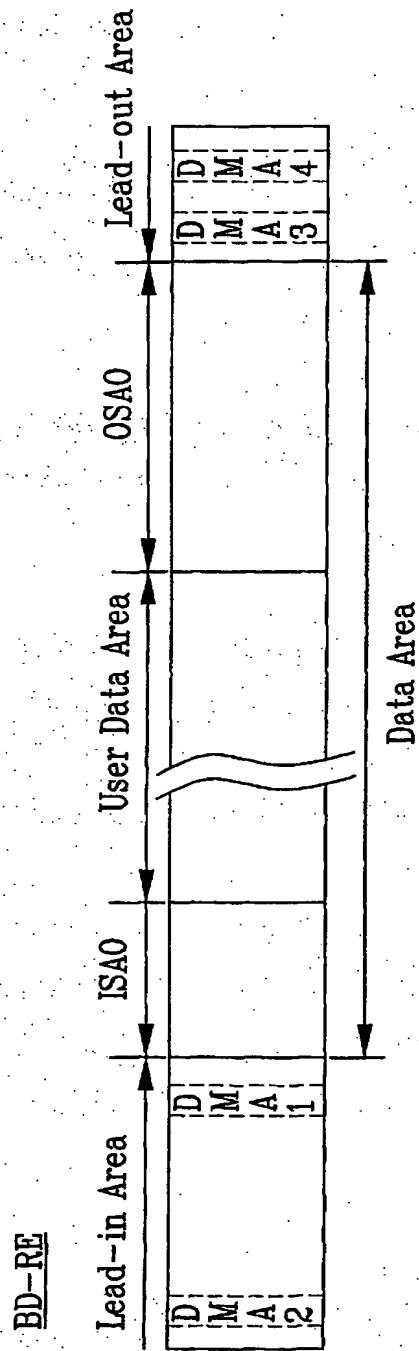




2/11

FIG. 2

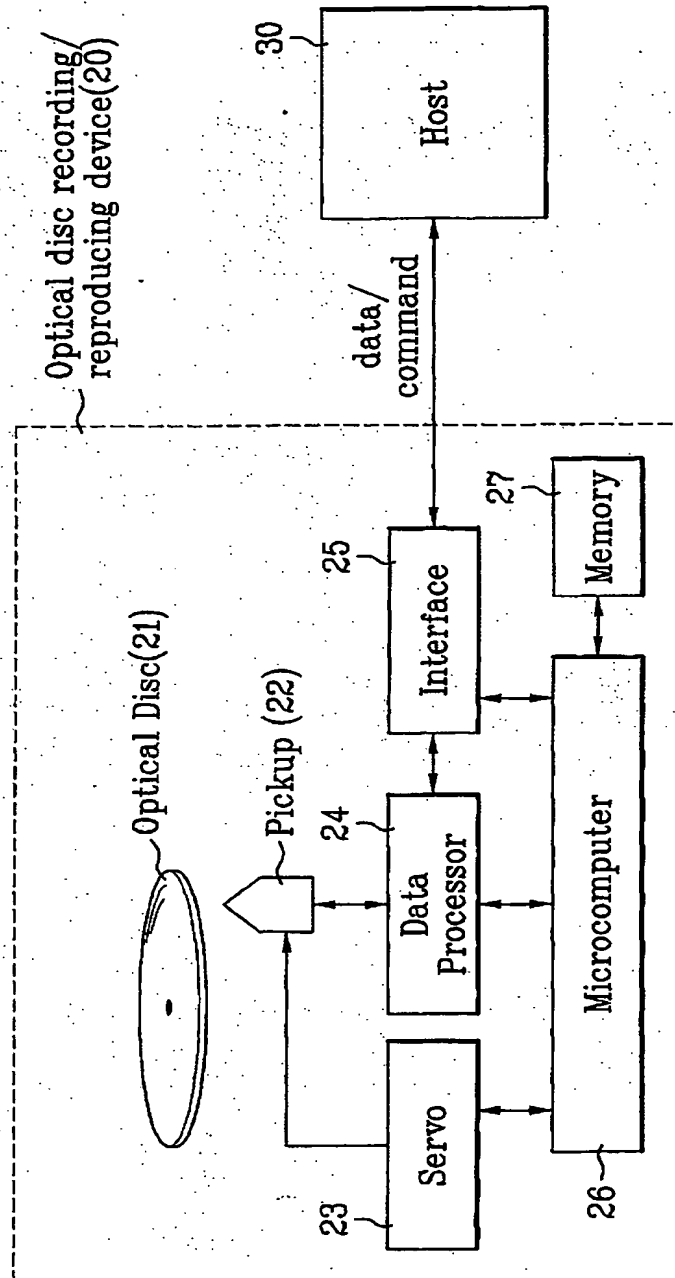


3/11

FIG. 3

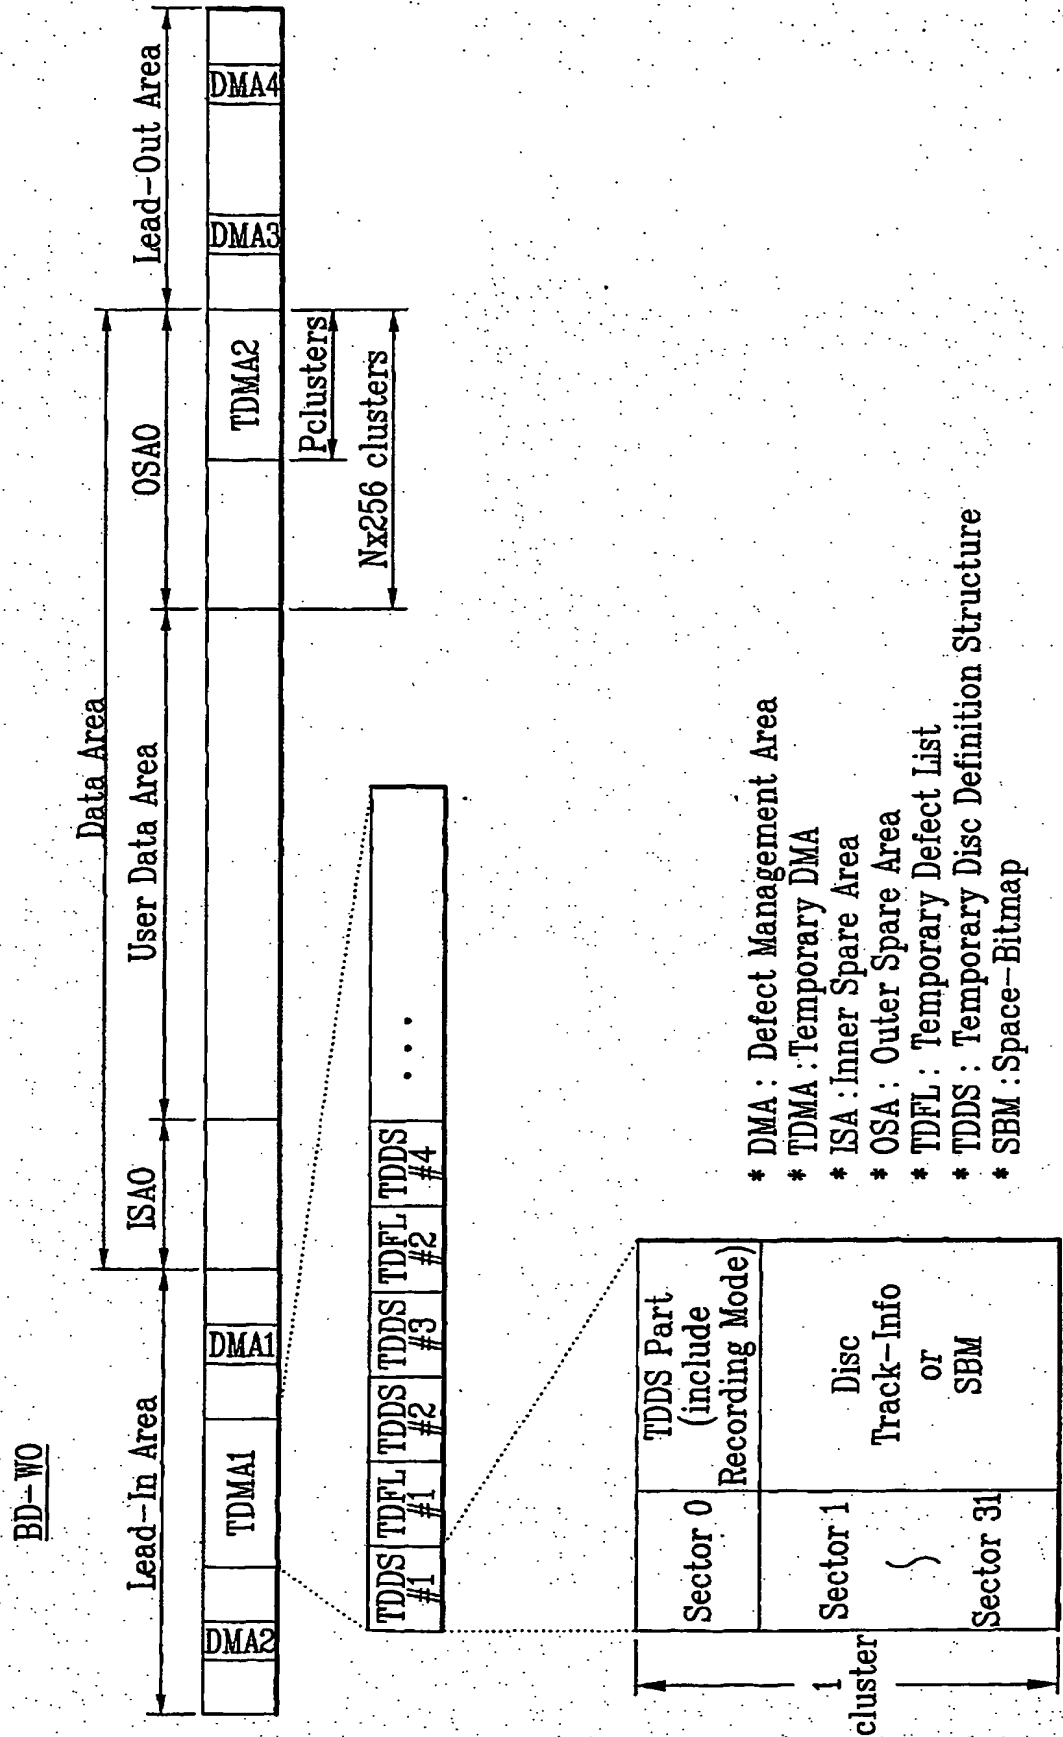

4/11

FIG. 4

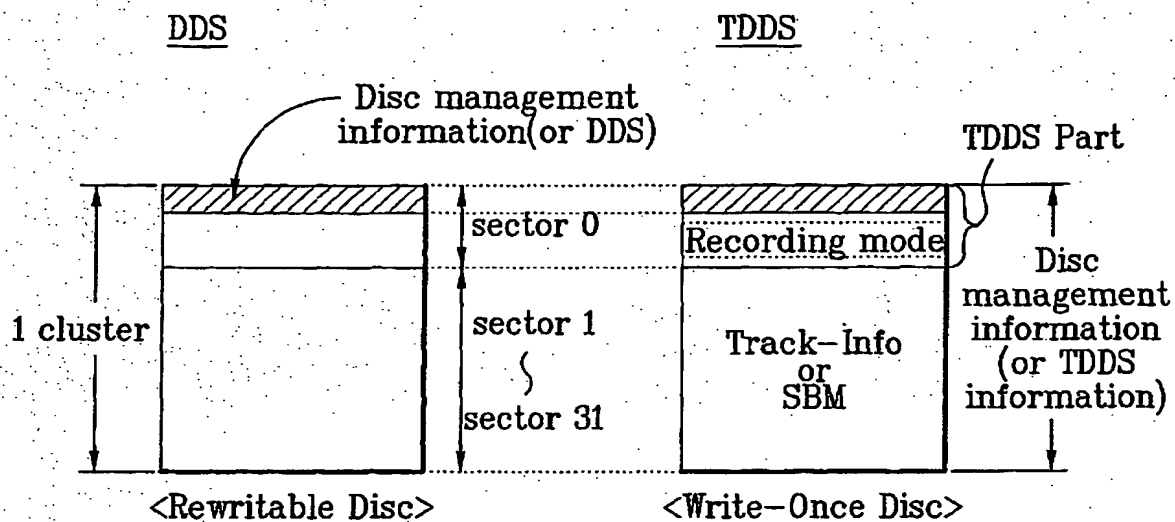


## \* Recording mode

- 0000 0000b : Sequential Recording
- 0000 0001b : Random Recording

5/11


FIG. 5

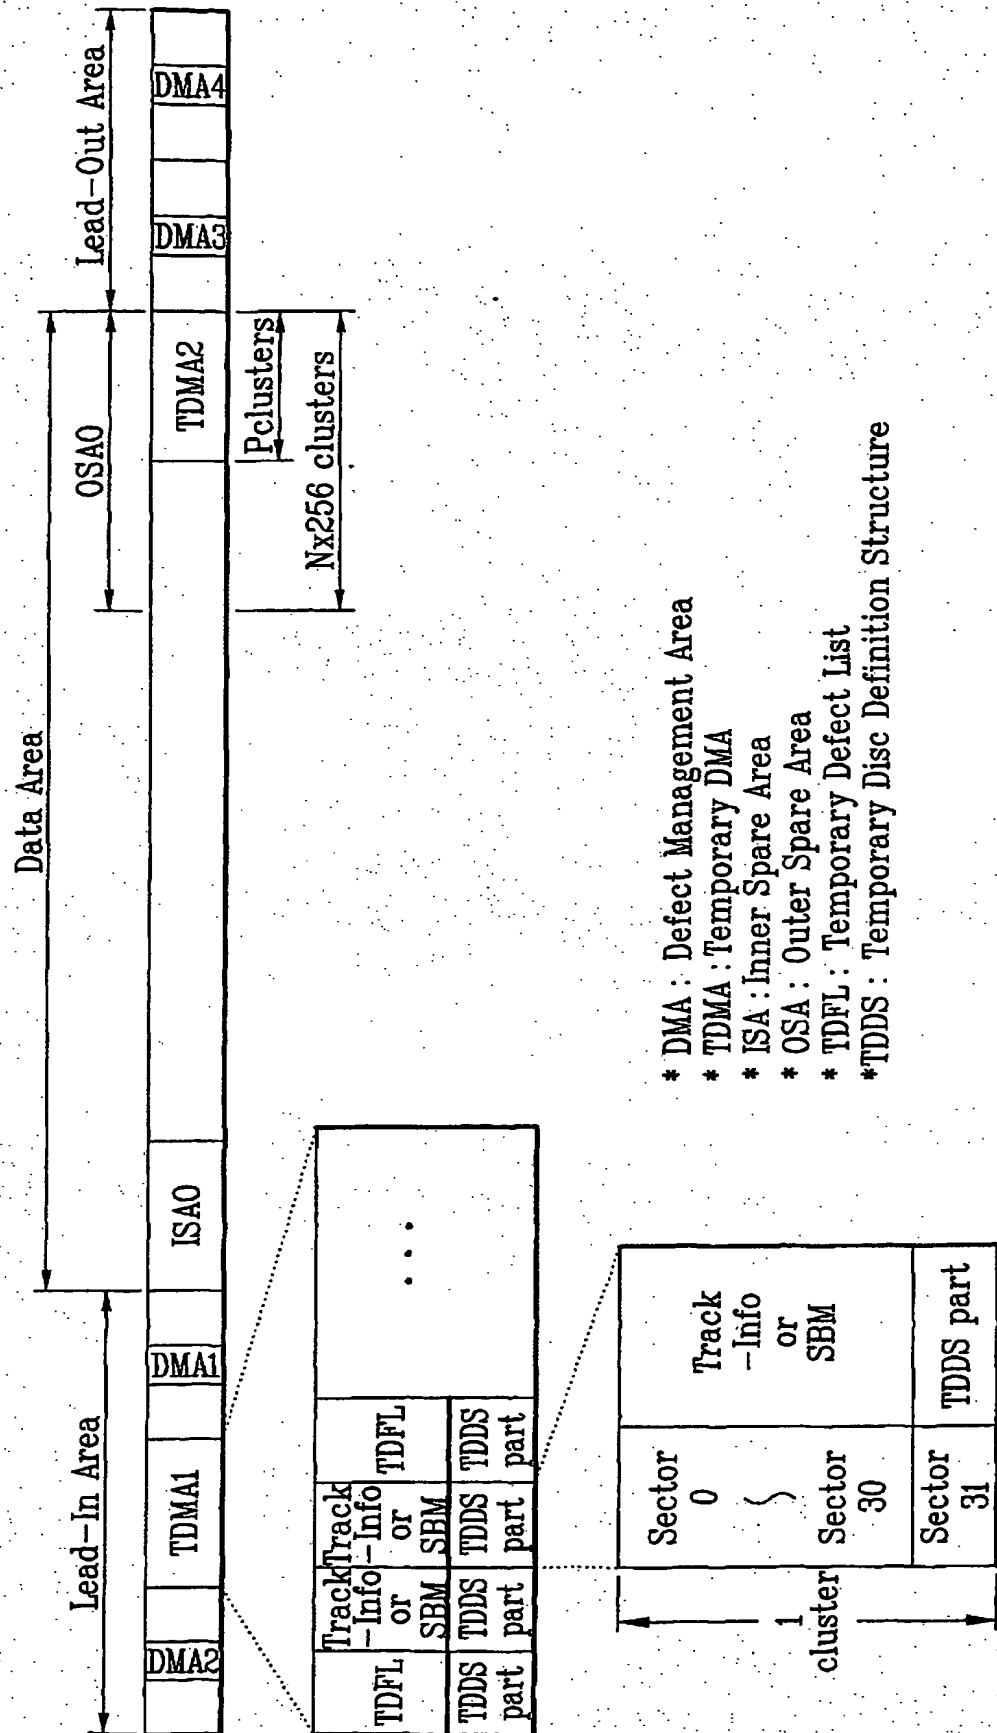


- \* DMA : Defect Management Area
- \* TDMA : Temporary DMA
- \* ISA : Inner Spare Area
- \* OSA : Outer Spare Area
- \* TDFL : Temporary Defect List
- \* TDDS : Temporary Disc Definition Structure

6/11

FIG. 6A

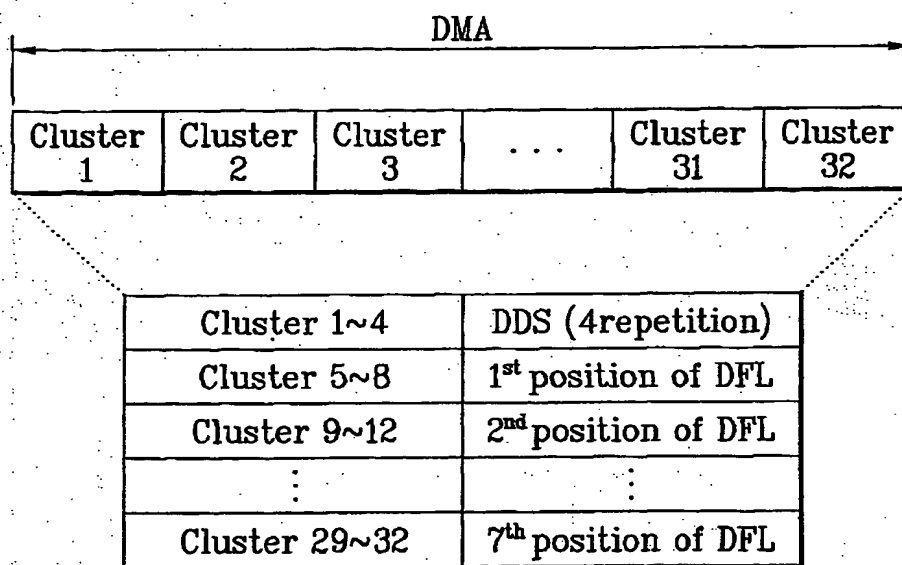
Single Layer BD- WO

**FIG. 6B**

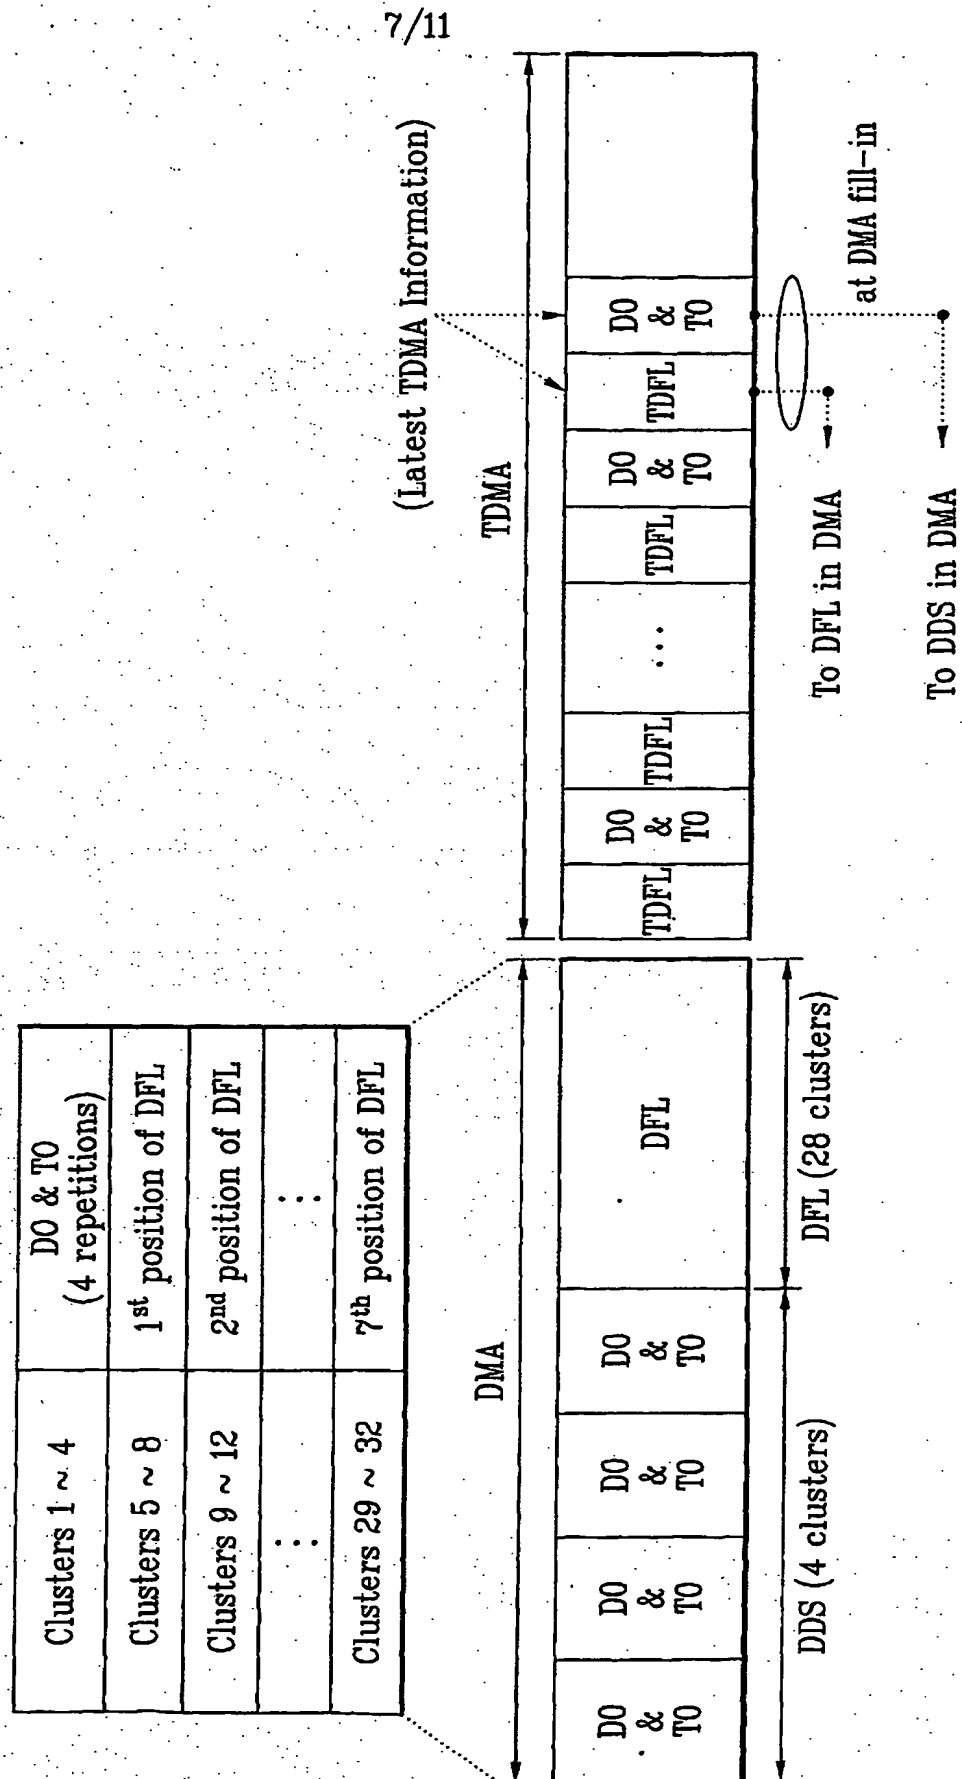

8/11

FIG. 6C

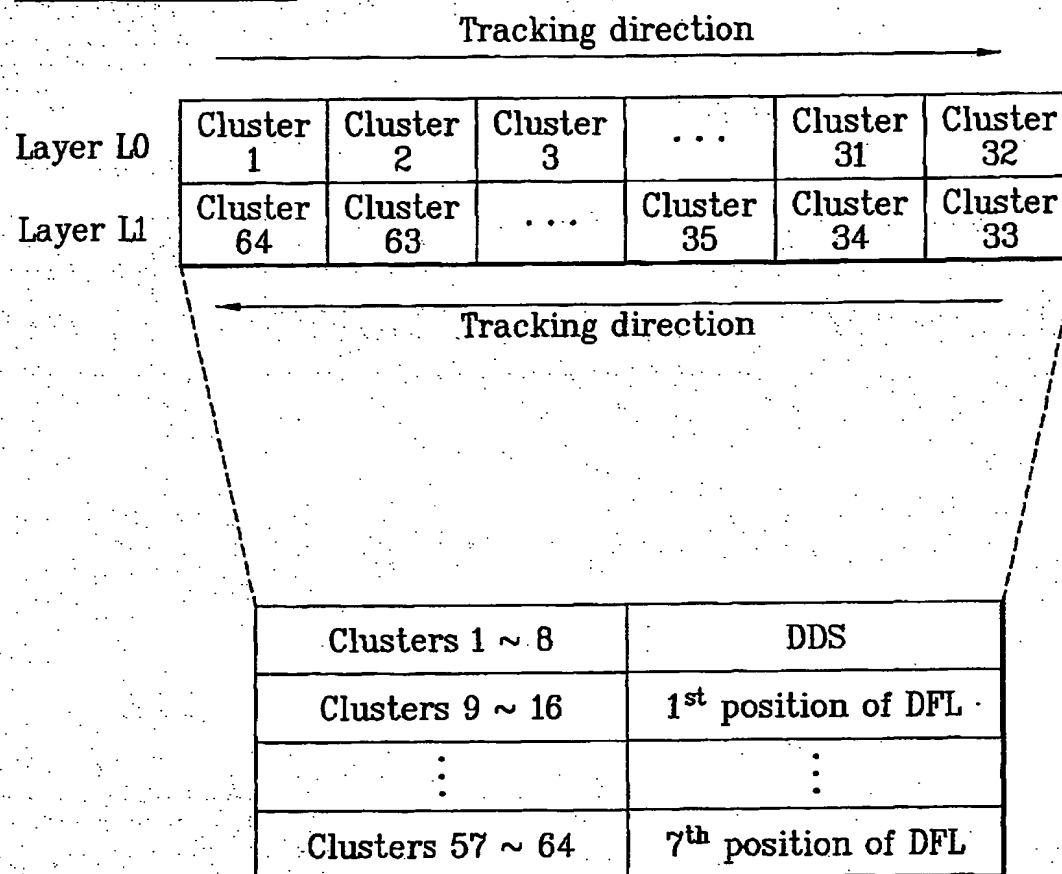Dual Layer BD-WO

9/11

FIG. 7

|              |     | DMA fill-in timing | contents           | Location in DMA |
|--------------|-----|--------------------|--------------------|-----------------|
| Finalization | 50a | No more record     | Latest TDDS & TDFL | DDS & DFL       |
|              | 50b | TDMA Full          | Latest TDDS & TDFL | DDS & DFL       |
|              | 50c | User selection     | Latest TDDS & TDFL | DDS & DFL       |

FIG. 8

|              |     | DMA fill-in timing | contents                                 | Location in DMA |
|--------------|-----|--------------------|--|-----------------|
| Finalization | 50d | Non D.M            | Predetermined Value<br>(ex,zero padding) | DFL             |
|              | 50a | No more record     | Latest TDDS                              | DDS             |
|              | 50b | TDMA Full          | Latest TDDS                              | DDS             |
|              | 50c | User selection     | Latest TDDS                              | DDS             |

- D.M : Defect Management
- DMA : Defect Management Area



10/11

FIG. 9A

|     | DMA fill-in timing                      | contents              | Location in DMA  |
|-----|---|-----------------------|------------------|
| 50e | No more record<br>But Spare & TDMA left | Latest<br>TDDS & TDFL | Part of DMA      |
| 50b | TDMA Full                               | Latest<br>TDDS & TDFL | Remainder of DMA |
| 50c | User selection                          | Latest<br>TDDS & TDFL | Remainder of DMA |

Finalization {

- D.M : Defect Management
- DMA : Defect Management Area

FIG. 9B

|                  |  |
|------------------|--|
| Clusters 1 ~ 2   | DDS<br>(before Finalization)             |
| Clusters 3 ~ 4   | DDS<br>(at Finalization)                 |
| Clusters 5 ~ 8   | DFL<br>(before Finalization)             |
| Clusters 9 ~ 12  | 1st position of DFL<br>(at Finalization) |
| ⋮                | ⋮  |
| Clusters 29 ~ 32 | 6th position of DFL<br>(at Finalization) |

11/11

FIG. 10

| (T)DDS status flag (1byte) in DMA/TDMA |  |
|--|--|
| 0000 0000                              | In DMA, after User select finalization |
| 0000 1111                              | In DMA, after no more record           |
| 1111 0000                              | In DMA, after TDMA Full                |
| 1111 1111                              | In TDMA, before finalization           |

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 03/02009-0

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: G11B 7/00, 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: G11B 7/00, 11/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

G11B 7/0045, 11/10, 11/12, 13/04, 20/10, 20/12

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|----------|--|-----------------------|
| A        | US 5805536 A (Gage et al.) 8 September 1998 (08.09.98)                             | 1,19,26-28,46         |
| A        | US 5247494 A (Ohno et al.) 21 September 1993 (21.09.93)                            | 1,19,26-28,46         |
| A        | EP 0556046 A1 (Sony) 18 August 1993 (18.08.93)                                     | 1,19,26-28,46         |

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

23 January 2004 (23.01.2004)

Date of mailing of the international search report

12 February 2004 (12.02.2004)

Name and mailing address of the ISA/AT

Austrian Patent Office

Dresdner Straße 87, A-1200 Vienna

Facsimile No. 1/53424/535

Form PCT/ISA/210 (second sheet) (July 1998)

Authorized officer

GRÖSSING G.

Telephone No. 1/53424/386

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
PCT/KR 03/02009-0

| Patent document cited<br>in search report |   |         | Publication<br>date |  | Patent family<br>member(s) | Publication<br>date |
|---|---|---------|---------------------|--|----------------------------|---------------------|
| EP  | A | 556046  |                     |  | KR B 275000                | 2000-12-15          |
|   |   |         |                     |  | DE T 69318053T             | 1998-08-20          |
|   |   |         |                     |  | DE D 69318053D             | 1998-05-28          |
|   |   |         |                     |  | US A 5309419               | 1994-05-03          |
|   |   |         |                     |  | EP A 0556046               | 1993-08-18          |
|   |   |         |                     |  | JP A 5225570               | 1993-09-03          |
| US  | A | 5247494 | 1993-09-21          |  | JP A 60263353              | 1985-12-26          |
| US  | A | 5805536 | 1998-09-08          |  | none                       |                     |

PCT/ISA/210 (patent family annex) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**